



PCT/IB 0 3 / 0 5 4 1 3

05.01.04



Rec'd PCT/PTO

31 MAY 2005

**PRIORITY  
DOCUMENT**SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 15 JAN 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 19 November 2003


**BEST AVAILABLE COPY**



1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

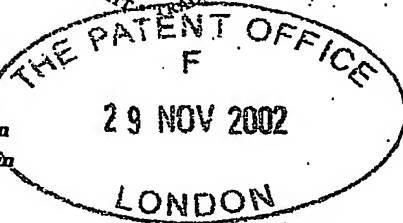

The Patent Office

Cardiff Road  
Newport  
South Wales

1. Your reference

6.70.1049 UK

02DFC02 F767560-18 D00073 NP10 8QQ  
P01/7700 0.00-0227943.8

2. Patent application number

(The Patent Office will fill in this part)

0227943.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

INTERBREW S.A.  
VARSTRAAT 94  
B-3000 LÈUVEN  
BELGIUM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

A BELGIAN CORPORATION

7906530002

4. Title of the invention

KEG TAP ADAPTER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

G.F. REDFERN & CO.  
LYNN HOUSE  
IVY ARCH ROAD  
WORTHING  
WEST SUSSEX. BN14 8BX

Patents ADP number (if you know it)

1412002 8435356001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

12

Claim(s)

5

Abstract

1

Drawing(s)

6 x 6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)


Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

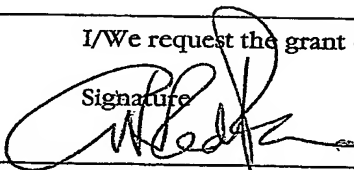

Date

29 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs. S.M. Camp  
01903 820466

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

- 1 -

## KEG TAP ADAPTER

### Field of the Invention

The present invention relates to an alcohol beverage dispensing apparatus and in particular, relates to a tap adapter mounted within the dispensing apparatus.

### Background of the Invention

It is known to contain alcohol, such as wine in bags contained in a cardboard type container where the wine feeds by gravity through a shut off tap mounted outside the container. Further, it is known to fill a bag with beer in a keg. In the case of a beer keg, pressure is applied to the bag to dispense the beer from the bag and out of the keg. Further, the bag is inserted into the keg container prior to the beer being filled into the bag through a valve assembly.

However, there is a need for the user to be able to control the dispensing of the beer from the keg out through a tap connected to the valve assembly. In a home beverage dispensing system suitable for use in dispensing beer, the keg is a replaceable item and the tap is an item that forms part of the beer dispensing apparatus. This raises a cleansing issue

for the tap between keg refills. Also there is a need for the tap to be readily connectable with the beer keg.

#### Summary of the Invention

It is an object of the present invention to provide a tap adapter for use in an alcohol beverage dispensing apparatus which provides for a simple and reliable interconnection between alcohol stored in a keg and a tap located externally of the housing for the beverage dispensing apparatus.

It is another object of the present invention to provide a tap adapter which has a interchangeable cartridge that provides for a new clean tap adapter cartridge with every keg refill.

It is a further object of the present invention to provide a tap adapter for use in a dispensing apparatus that further provides for quick and simple connection to an air supply valve used to pressurize a bag contained within the keg.

The present invention relates to a tap adapter suitable for use in dispensing an alcohol beverage from a dispensing apparatus having a keg and a valve assembly mounted to the keg. The tap adapter has a hollow arm adapted for mounting to the valve assembly in fluid flow communication with a beverage dispensing valve in the valve assembly. The hollow arm has a first end portion and a second end portion remote therefrom. The first end portion is adapted to releasably connect to the beverage dispensing valve to open the valve. The adapter has a tap connected to the remote end of the hollow arm and is operable between a closed position shutting off flow of beverage through the hollow arm and an open position permitting beverage to flow through the hollow arm and out the tap.

Preferably the tap is integrally formed with the remote end portion of the hollow arm. Alternatively, the tap may be assembled to the remote end portion of the adapter.

The dispensing adapter may further have an air line passageway adapted to be connected to an air valve of the valve assembly. The air passageway has a first end portion that connects to and opens the air valve. The air line passageway has a second end portion housing an air valve that is adapted to be connected to a pressurized air supply. Preferably, the air line passageway is an integral part of the adapter.

The adapter may further include a base portion for supporting the hollow arm. The base portion has a neck adapted to releasably engage the valve assembly and an annular flange portion adapted to abut the keg.

Preferably, the tap has a cam member that rotates to close fluid flow through the hollow arm of the adapter.

The hollow arm may be separable to receive a tubular cartridge for interconnecting the tap with the beverage dispensing valve. The hollow arm may be pivotally connected adjacent the first end portion to permit for separation of the hollow arm into an upper arm portion and a lower arm portion. The lower arm portion is adapted to receive the cartridge in snap fit relation therewith.

In accordance with an aspect of the present invention there is provided an alcohol beverage dispensing apparatus. The apparatus comprises a keg, a valve assembly, a housing, dispensing adapter, and a tap. The keg contains an alcohol beverage and has a neck. The valve assembly is mounted to the neck of the keg. The valve assembly has a first valve through which beverage is dispensed from the keg. The keg and valve assembly are positioned in the housing during beverage

dispensing. The dispensing adapter is releasably mounted in sealed relation with the valve assembly in fluid flow communication with the first valve. The dispenser adapter has a hollow arm having a first end portion and a second end portion remote therefrom. The first end portion is connected to the first valve to open the valve. The hollow arm extends from the valve assembly out through the housing to position the remote end portion of the hollow arm outside of the housing. The tap is connected to the remote end of the hollow arm. The tap is operable between a closed position shutting off flow of beverage through the hollow arm and an open position permitting beverage to flow through the hollow arm and out the tap.

#### Brief Description of The Drawings

For a better understanding of the nature and objects of the present invention reference may be had to the accompanying diagrammatic drawings in which:

Figure 1 is a front elevation view of a home beer dispensing apparatus in accordance with the present invention;

Figure 2 is a side elevation view of the home beer dispensing apparatus;

Figure 3 is broken away perspective view of the keg showing the valve and spear assembly mounted within the keg;

Figure 4 is a sectional side view of the valve and spear assembly as shown in Figure 3;

Figure 5 is a plan view of the valve body of the valve assembly;

Figure 6 is a sectional side view of the tap adapter mounted to the keg inside the dispensing apparatus;

Figure 7 is a side sectional view of the tap adapter of Figure 6

showing the tap pivoted open;

Figures 8 and 9 are perspective views of the tap adapter respectively showing the hollow arm in closed and open positions; and,

Figure 10 is a side view of another embodiment for the tap adapter.

#### Detailed Description Of The Invention

Referring to Figures 1 and 2 there is shown a home beer dispensing apparatus, appliance or unit 10. The dispensing apparatus 10 is primarily intended for use in domestic kitchens but may also be used in utility rooms, garages, domestic bars, caravans etc. While the preferred embodiment relates to dispensing beer, alternatively carbonated solutions or other alcohol beverages may be dispensed by apparatus 10.

The home beer dispensing apparatus 10 has a front wall 12 and a dispensing tap 14 protruding forward of the front wall 12. A drip tray 16 also protrudes forward of the front wall 12 and is adapted to support an open glass container 18 below the dispensing tap 14. The home beer dispensing apparatus 10 further has a base 21 adapted to rest on a counter top. The front wall 12 is an extension of two pivoting side walls 20 which may be moved between closed and open positions to allow the keg 22 (see Figure 2 in broken lines) to be inserted into the housing of the home beer dispensing apparatus 10.

The housing 17 of the home beer dispensing apparatus 10 further includes a top wall 24 and a rear wall 26. The rear wall 26 has a grill 30 that permits for air circulation within the home beer dispensing apparatus 10. An electrical cord 32 extends through the rear wall 26 of the apparatus 10 to provide a connection into a main electrical supply to supply electrical power to the electrical components housed within the unit 10. Alternatively, a 12 Volt DC supply input may be used.



The dispensing apparatus 10 has a cooling system 34 located behind and below keg 22 that is adapted to cool beer in keg 22 when keg 22 is placed into dispensing apparatus 10

Referring now to Figures 3 through 6, the valve assembly 40 and spear 102 are shown. The valve assembly 40 and spear 102 form part of the beverage dispensing assembly.

The valve assembly 40 is adapted to fit into a raised collar aperture 42 of keg 22. The valve assembly 40 has an annular shaped body 46 that is secured in the aperture 42. The valve body 46 has an annular groove 47 and flange 49 that is adapted to extend above the keg 22 for mating with a tap dispensing adapter 38 (Figure 6) connected to tap 14.

The valve body 46 has a first passageway 48, a second passageway 50, and a third passageway 52 spaced apart from each other and extending through the valve body 46. As best seen in Figure 6, the first passageway 48 is centrally disposed or located within the valve body 46 and the second and third passageways 50, and 52 are spaced radially of the first central passageway 48.

The valve assembly includes a first valve 54, a second valve 56 and a third valve 58. The first valve 54 is seated in the first passageway 48 for controlling the flow of the beverage or beer through the first passageway 48 into and out of the bag 44.

The second valve 56 is seated in the second passageway 50 for controlling the flow of gas such as carbon dioxide through the second passageway 50 into and out of the bag.

The third valve 58 is seated in the third passageway 52 and controls the flow of gas through the third passageway 52 into and out of the keg 22 exterior to the bag 44.

Each valve, 54, 56, and 58 has a valve actuator or stem 60 that effectively opens and closes the valve. The valve stem 60 extends away from the valve body 46 by a different predetermined distance for each of valves 54, 56 and 58. Each of the valves 54, 56 and 58 further include a valve head 70 connected to the valve stem 68. The valve head 70 carries an O-ring 72 which is adapted to seal the valve head within the respective passageway. A spring 74 urges the valve head 70 into sealing engagement with its corresponding passageway. The valve stems 68 are accessible from outside the keg 22 for moving each valve head 70 into an open and closed position to respectively enable and inhibit fluid flow through passageways 48, 50 and 52.

The valve body 46 has an annular recessed groove 62 recessed in an inner wall 64 of the valve body 46. The inner wall 64 is positioned within the keg 22. The recessed grooves 62 is adapted for receiving the neck 66 of bag 44 in press fit relation therewith. The annular recessed groove 62 has a diameter that surrounds the first and second passageways 48 and 50. The third passageway 52 is located outside of the diameter of the recessed groove 62 and as a result, the third passageway 52 is located outside of the bag 44.

The keg 22 has a collar flange 82 which defines the raised collar aperture 42, the valve body 46 has an outer peripheral wall 63 with a recessed groove 61 extending around the outer wall 63. An intermediate ring or bung 80 is adapted to seat the valve body 46 within the raised collar aperture 42. The intermediate ring 80 has inner and outer walls 84, 86. The inner wall 84 has flange 88 extending inwardly thereof that is adapted to fit into the recessed groove 61 of the outer wall 63 of the valve body 46. The outer wall 86 of the intermediate ring 80 has a resilient

barb 90 and a locking flange 92 spaced from the barb 90 so as to define a outer locating groove 94 into which the collar flange 82 of the keg 22 is held. The barb 90 is adapted to pass through the aperture 42 and spring back into locking engagement with the collar flange 82 so as to lock the valve assembly 40 in place. Special tools are required to remove the valve assembly 40 and the intermediate ring 80 from the collar flange 82 of the keg 22 once the keg 22 is returned to the brewery for refilling.

In order to ensure that the contents of the keg 22 have not been tampered with, the keg 22 has an anti-tamper ring 96 that overlays the intermediate ring 80, a portion of the keg 22 and a portion of the valve body 46. The intermediate ring 80 has an aperture 98 that passes completely through the intermediate ring 80 to provide a vent passageway. The anti-tamper ring 96 has a flange part 100 that is inserted into the vent aperture 98 of the intermediate ring 80. In the event the anti-tamper ring 96 is removed from the keg 22, vent aperture 98 is open and the contents or any pressure within the keg 22 is released. Further, as a pressure relief feature, the anti-tamper ring 96 is designed to release from aperture 98 when pressure in keg 22 exceeds a predetermined valve to vent pressurized air through aperture 98.

Referring to Figures 6 to 9, the tap adapter 38 of the present invention is shown in more detail. The tap adapter 38 is mounted to the valve assembly 40 in fluid flow communication with the first valve 54. This attachment is a snap action sealed attachment on inner and outer walls of valve flange 49.

The dispenser adapter 38 has a hollow arm 120 that has a first end portion 122 adjacent the valve assembly 40 and a second end portion 24 which is remote therefrom. The first end portion 122 is connected to the

first valve 54 so as to open the valve 54. This connection is made when the adapter is snap fitted downwardly onto the valve neck flange 49. The hollow arm 120 extends from the valve assembly 40 out through the housing 17 to a position where the remote end portion 124 of the hollow arm 120 is outside of the housing 17.

As better shown in Figures 7 and 9, the hollow arm 120 is separable by a hinge point 130. The arm 120 is separable into an upper arm portion 132 and a lower arm portion 134. As shown in Figure 7, lower arm portion 132 carries the tap 14 integral therewith. The lower arm portion 134 comprises a half hollowed out passageway 137 (see Figure 9). Inserted into this lower arm portion 134 is a tubular cartridge 126 that has a tube 128 that interconnects the tap 14 with the first valve 54 so that the beverage may flow through the tube 128 and out the tap end 136.

The cartridge 126 is in effect a frame like member which is adapted to be snap fitted into place with the lower arm portion 134. The cartridge 126 also carries the tube 128 therethrough for connection into the first end portion 122 of the hollow arm 120 so that when the cartridge is inserted into the hollow arm 120, and the hollow arm is subsequently mounted onto the valve assembly 40, one end 129 of the tube 128 sealingly engages passageway 48 and opens valve 54 so that beverage may be dispensed through valve 54 and into the tube 128. The upper arm portion 132 as shown in Figure 7 may then be snapped back into place relative to the lower arm portion 132. Alternatively, the upper arm portion 132 and the lower arm portion 134 may be held in place once the doors 22 of the appliance are closed and posts 170 (Figure 6) are brought into engagement with both the upper and lower portions 132, 134 of the

hollow tube 120 to thereby hold them together.

The adapter 38 is provided with a base portion 140 for supporting the hollow arm 120. The base portion 140 has a neck or supporting ring 142 that is adapted to surround and releasably engage the valve neck flange 49. The base portion 140 further includes an annular flange portion 144 which provides an inverse shape of a saucer that is adapted to abut the top surface of the keg 22 and to be supported thereon.

The base portion 140 has locking spring members 146 (see Figure 9) that engage the valve neck groove 47 and are movable to release the adapter 38 from the valve assembly 40.

Tap 14 is connected to the remote end 124 of the hollow arm 120 and in particular the lower arm portion 134. The tap is operable between a closed position to shut off the flow of beverage through the hollow arm as shown in Figure 6 and an open position permitting beverage to flow through the hollow arm and out the tap 14 as shown in Figure 7. The tap 14 also forms an integral part of the hollow arm 120 and in particular the lower portion 134. The tap 14 has a handle 140 that is pivotally connected to a cam member 150 so as to rotate cam member 150 into pinching engagement against tube 128 as indicated at pinching point 152. The handle will be normally biased in this position and may be drawn forward to release cam member 150 from the tube 128 and thereby open the tube at point 152 and permit beverage to be dispensed along the tube 128 contained within the hollow arm 120 from the valve assembly 40.

As shown in Figures 6 to 9, the dispensing adapter 38 includes an air line passageway 160 adapted to be connected to a second air valve 58 in fluid flow communication. The air line passageway 160 has a first end or cap member 162 that connects to and opens the second valve 58 when

the adapter 38 is snap fitted onto the valve system 40. The air line passageway 160 has a second end portion 164 having a one way air valve 166 that is normally shut and that is opened when connected to a pressurized air supply (not shown). The air line passageway 160 is an integral part of the adapter 38.

The adapter 38 of the present invention has many advantages. In particular, the adapter 38 can be sold as part of the dispensing apparatus 10 to a consumer and the cartridge 126 may be sold as a replacement cartridge with each keg 22 refill for insertion into adapter 38 so as to provide a sanitary dispensing medium for the beverage. The cartridge 126 is inserted into the adapter 38 and the adapter 38 is moved into its closed position and snapped onto the keg neck 47. Because the adapter carries the tap 14 which is in a closed position, the snapping of adapter 38 onto the valve assembly 40 of the keg 22 in sealing relation therewith opens valve 54 and provides for a simple and reliable connection that does not result in any loss of beverage. At this time, the air supply line 160 is connected to the air valve 58 of the valve assembly 40. The keg 22 is then placed into the dispensing apparatus 10 and the air valve 166 of the air line passageway 160 is connected to the air supply. At this time, the doors or pivoting side walls 20 of the dispensing apparatus 10 are closed bringing the posts 170 into supporting relation against the upper and lower arm portions 132, 134.

The adapter 38 is now in a position to be able to dispense beverage by drawing handle 148 forward releasing the cam 150 from pinching the tube 128 allowing the beverage to flow therethrough out through valve 54. It should be understood that pressure is applied against the air bag 44 (Figures 3 and 4) in through the air line passageway 160 and through the

valve 58 of the valve assembly 40.

Referring to Figure 10 an alternative embodiment for the adapter assembly 38 is shown whereby the air line passageway 160 forms an independent assembly from the tap adapter 38. The air line passageway 160 in this embodiment is pivoted at point 172 within the dispensing apparatus 10. When the keg 22 is placed into the apparatus 10, the air line assembly 160 is pivoted about point 172 into engagement with the air valve 58.

WHAT IS CLAIMED IS:

1. An alcohol beverage dispensing apparatus comprising:
  - a keg for containing an alcohol beverage, the keg having a neck;
  - a valve assembly mounted to the neck of the keg, the valve assembly having a first valve through which beverage is dispensed from the keg;
  - a housing in which the keg and valve assembly are positioned during beverage dispensing;
  - a dispensing adapter mounted to the valve assembly in fluid flow communication with the first valve, the dispenser adapter having a hollow arm having a first end portion and a second end portion remote therefrom, the first end portion being releasably connected in sealed relation with the first valve to open the valve, and the hollow arm extending from the valve assembly out through the housing to position the remote end portion of the hollow arm outside of the housing; and,
  - a tap connected to the remote end of the hollow arm, the tap being operable between a closed position shutting off flow of beverage through the hollow arm and an open position permitting beverage to flow through the hollow arm and out the tap.
2. The dispensing apparatus of claim 1 wherein;
  - the valve system supports a bag within the keg filled with the beverage, the valve system including a second valve through which pressurized air is injected into the keg against an outside wall of the bag; and,
  - the dispensing adapter includes an air line passageway adapted to be connected to the second valve in sealed fluid flow communication therewith, the air line passageway having a first end portion that connects



to and opens the second valve, and the air line passageway having a second end portion housing an air valve that is adapted to be connected to a pressurized air supply.

3. The dispensing apparatus of claim 2 wherein the air line passageway is an integral part of the adapter.

4. The dispensing apparatus of claim 1 wherein:  
the valve assembly has a valve neck portion that extends beyond the neck portion of the keg; and,

the adapter has a base portion for supporting the hollow arm, the base portion comprising a neck adapted to surround and releasably engage the valve neck and an annular flange portion adapted to abut the keg

5. The dispensing arm of claim 4 wherein the base portion has spring locking members that engage the valve neck and are movable to release the adapter from the valve assembly.

6. The dispensing apparatus of claim 1 wherein the tap forms an integral part of the hollow arm of the adapter.

7. The dispensing apparatus of claim 1 wherein the tap has a cam member that rotates to close fluid flow through the hollow arm of the adapter.

8. The dispensing apparatus of claim 6 wherein the hollow arm is separable to receive a tubular cartridge for interconnecting the tap with the first valve and through which the beverage is dispensed.

9. The dispensing apparatus of claim 8 wherein the hollow arm is pivotally connected adjacent the first end portion to permit for separation of the hollow arm into an upper arm portion and a lower arm portion.

10. The dispensing apparatus of claim 9 wherein the lower arm portion is adapted to receive the cartridge in snap fit relation therewith.

11. The dispensing apparatus of claim 9 wherein the housing has position locating posts that engage the upper and lower arm portions of the hollow arm to hold them together.

12. The dispensing apparatus of claim 1 wherein the hollow arm supports an insertable tubular cartridge having a tube through which the beverage flows.

13. The dispensing apparatus of claim 1 wherein the tap has a cam member that rotates to close fluid flow through the tubular arm by pinching the tube closed.

14. A tap adapter for use in dispensing an alcohol beverage from a dispensing apparatus having a keg for containing an alcohol beverage, the keg having a neck, a valve assembly mounted to the neck of the keg, the valve assembly having a first valve through which beverage is dispensed from the keg, and a housing in which the keg and valve assembly are positioned during beverage dispensing, the tap adapter comprising:

a hollow arm adapted for releasably mounting in sealed relation with the valve assembly in fluid flow communication with the first valve, the hollow arm having a first end portion and a second end portion remote therefrom, the first end portion adapted to connect to the first valve to open the valve; and,

a tap connected to the remote end of the hollow arm, the tap being operable between a closed position shutting off flow of beverage through the hollow arm and an open position permitting beverage to flow through the hollow arm and out the tap.

15. The tap adapter of claim 14 wherein;

the valve system supports a bag within the keg filled with the beverage, the valve system including a second valve through which pressurized air is injected into the keg against an outside wall of the bag; and,

the dispensing adapter includes an air line passageway adapted to be connected to the second valve in sealed fluid flow communication therewith, the air line passageway having a first end portion that connects to and opens the second valve, and the air line passageway having a second end portion housing an air valve that is adapted to be connected to a pressurized air supply.

16. The tap adapter of claim 15 wherein the air line passageway is an integral part of the adapter.

17. The tap adapter of claim 15 wherein:

the valve assembly has a valve neck portion that extends beyond the neck portion of the keg; and,

the adapter has a base portion for supporting the hollow arm, the base portion comprising a neck adapted to releasably engage the valve neck and an annular flange portion adapted to abut the keg.

18. The dispensing arm of claim 17 wherein the base portion has spring locking members that engage the valve neck and are movable to release the adapter from the valve assembly.

19. The tap adapter of claim 14 wherein the tap forms an integral part of the hollow arm of the adapter.

20. The tap adapter of claim 14 wherein the tap has a cam member that rotates to close fluid flow through the hollow arm of the adapter.

21. The tap adapter of claim 19 wherein the hollow arm is separable to receive a tubular cartridge for interconnecting the tap with the first valve and through which the beverage is dispensed.

22. The tap adapter of claim 21 wherein the hollow arm is pivotally connected adjacent the first end portion to permit for separation of the hollow arm into an upper arm portion and a lower arm portion.

23. The tap adapter of claim 22 wherein the lower arm portion is adapted to receive the cartridge in snap fit relation therewith.

24. The tap adapter of claim 14 wherein the hollow arm supports an insertable tubular cartridge having a tube through which the beverage flows.

25. The tap adapter of claim 14 wherein the tap has a cam member that rotates to close fluid flow through the tubular arm by pinching the tube closed.

- 18 -

## KEG TAP ADAPTER

## ABSTRACT

A tap adapter suitable for use in dispensing an alcohol beverage from a dispensing apparatus having a keg and a valve assembly mounted to the keg is disclosed. The tap adapter has a hollow arm adapted for mounting to the valve assembly in fluid flow communication with a beverage dispensing valve in the valve assembly. The hollow arm has a first end portion and a second end portion remote therefrom. The first end portion is adapted to releasably connect to the beverage dispensing valve in a snap fitting manner to open the valve. The adapter has a tap connected to the remote end of the hollow arm and is operable between a closed position shutting off flow of beverage through the hollow arm and an open position permitting beverage to flow through the hollow arm and out the tap. The hollow arm houses an interchangeable cartridge that may be provided with every keg refill for the dispensing apparatus.

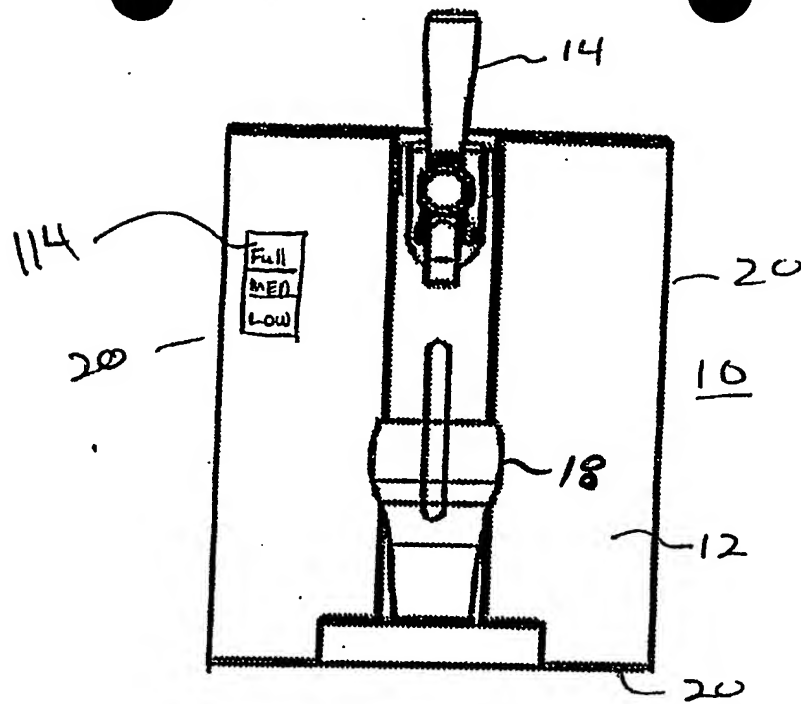


FIG. 1

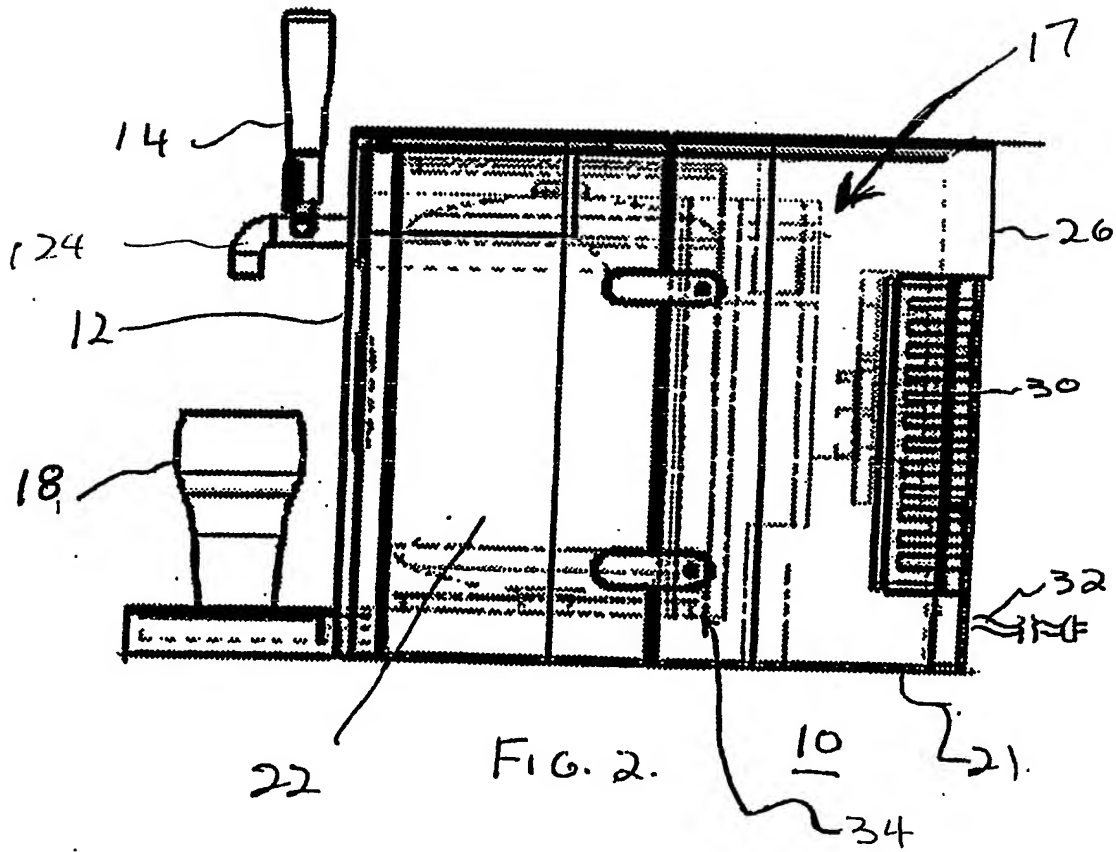


FIG. 2.

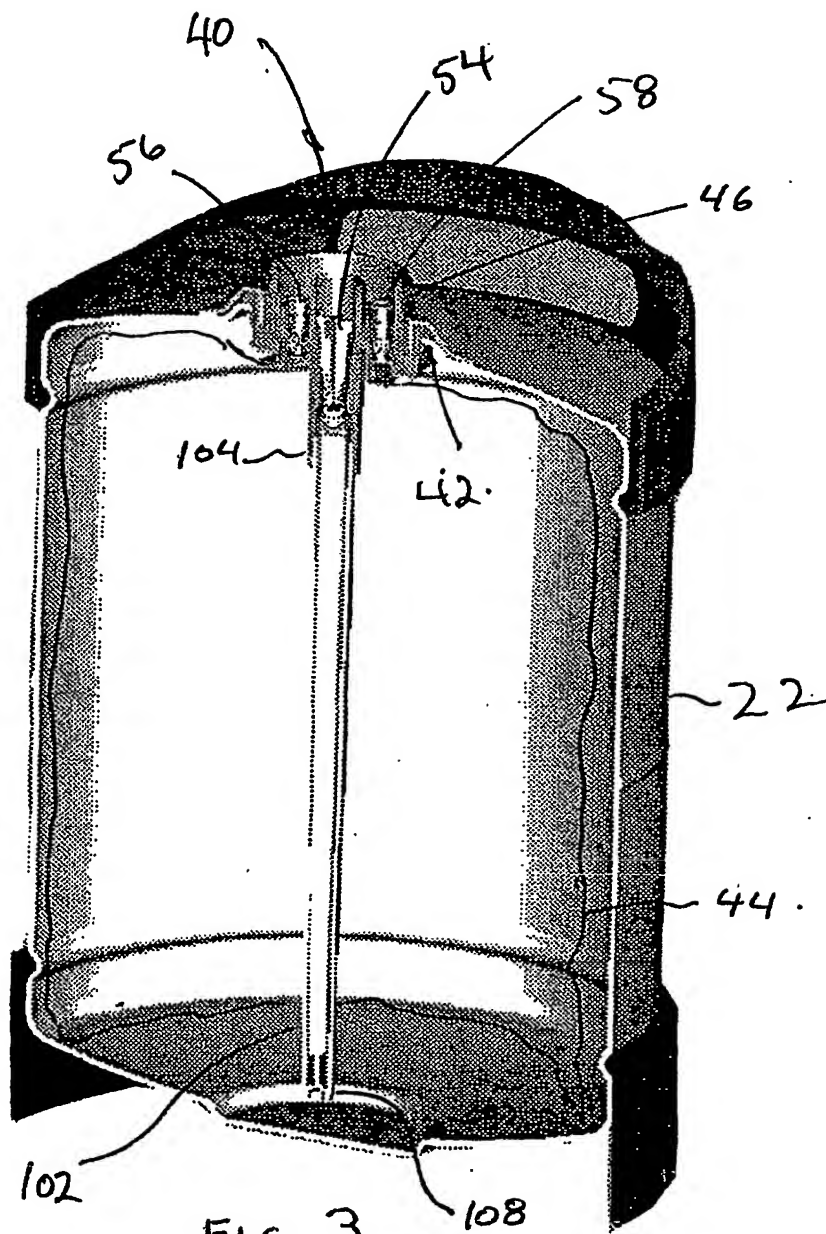


FIG 3

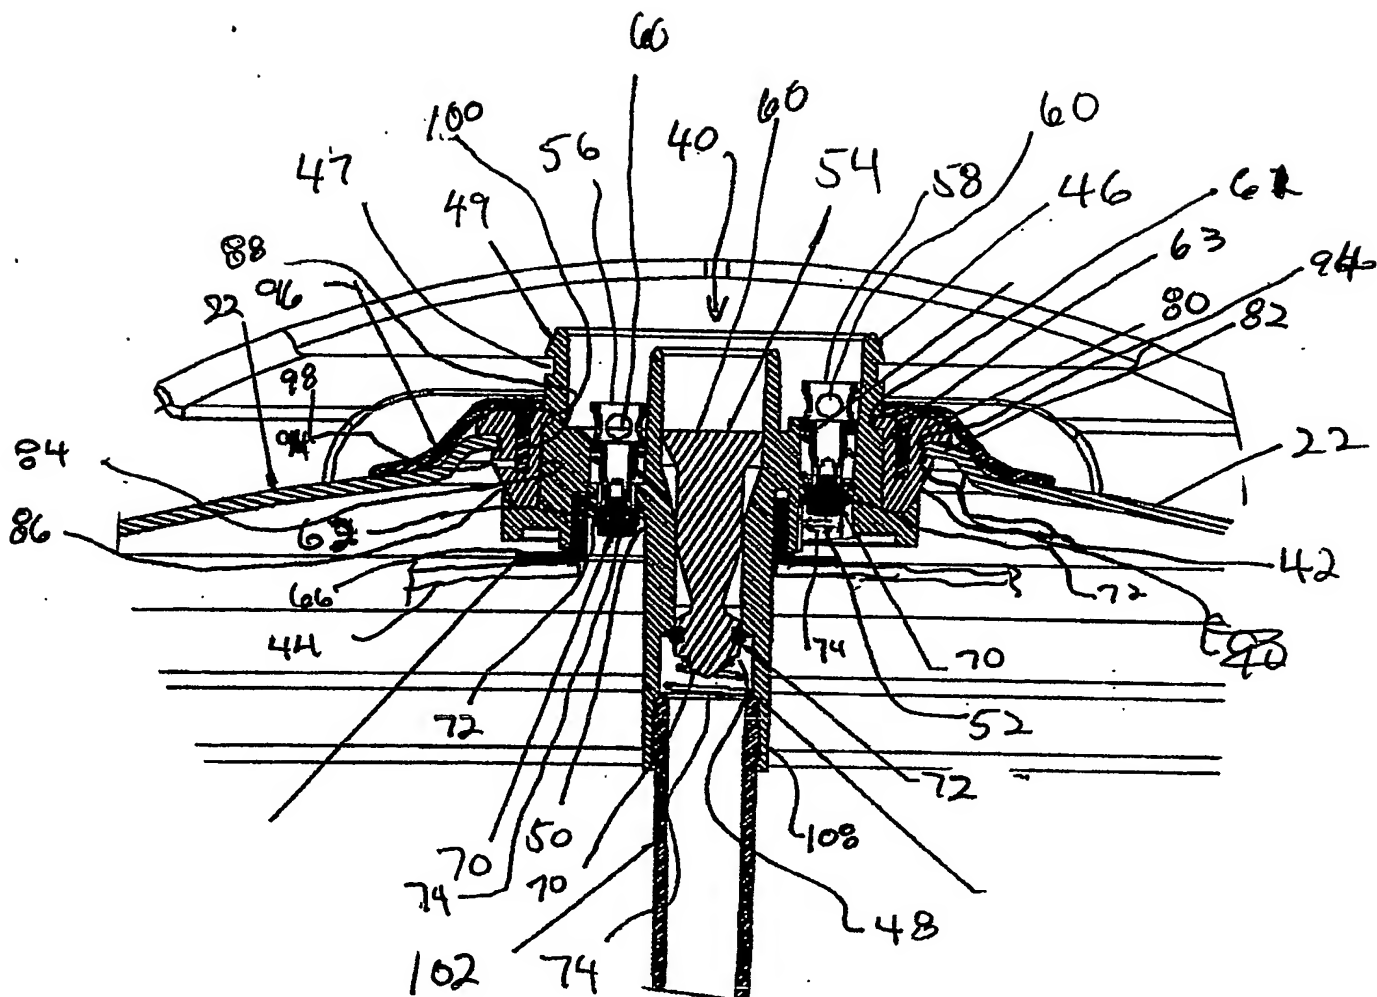
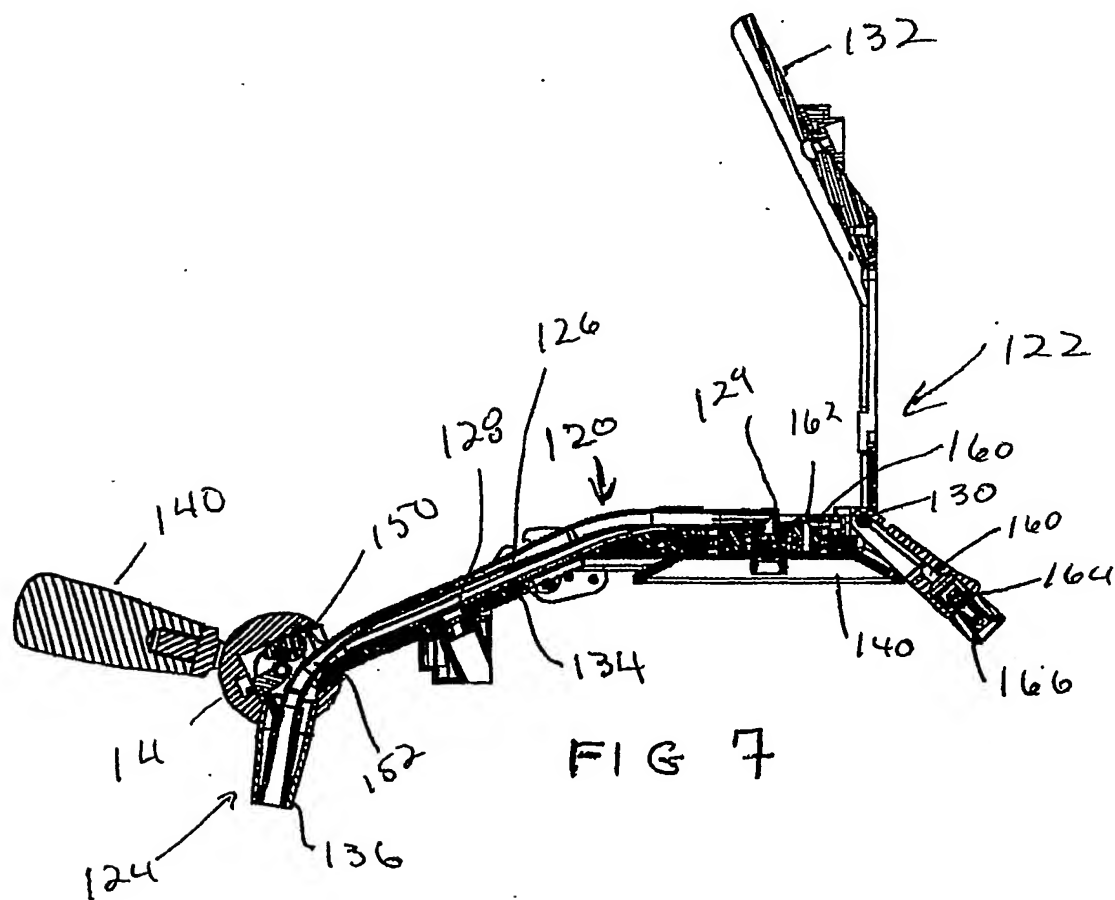
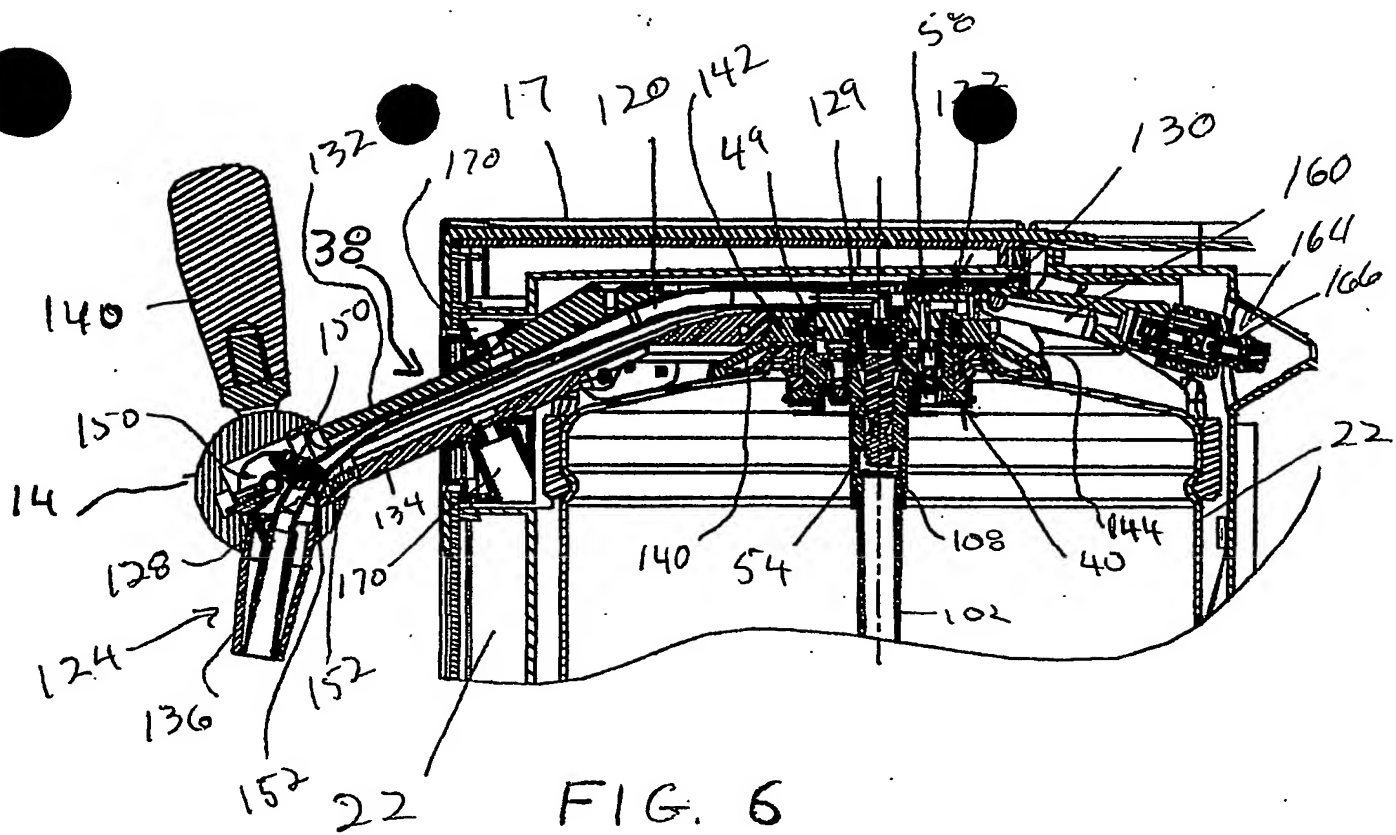
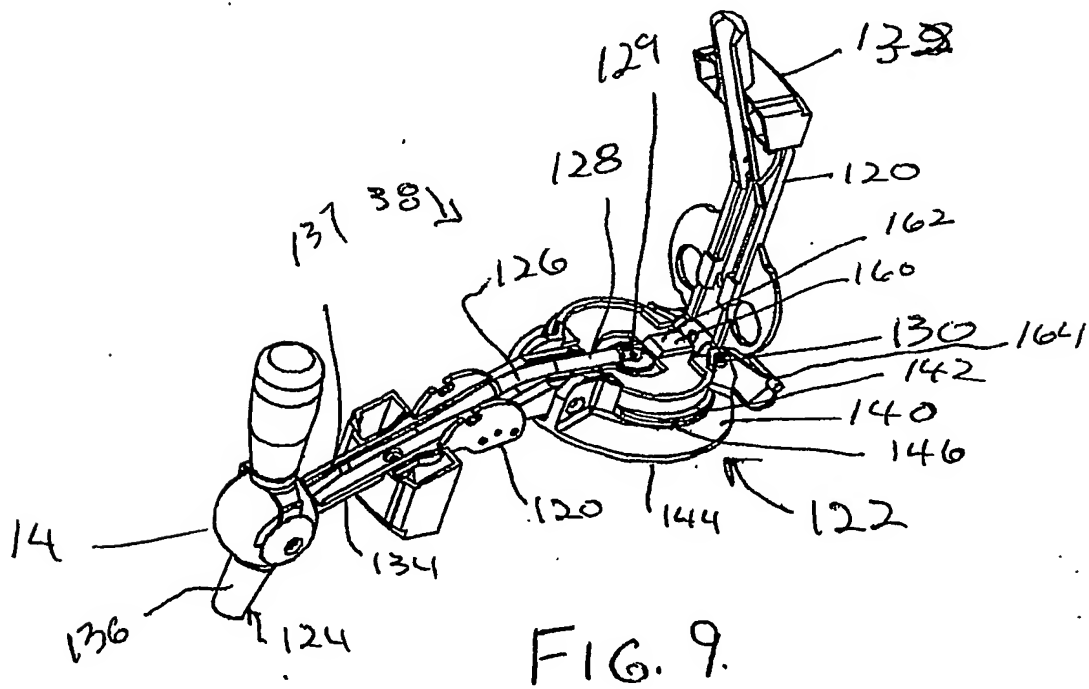
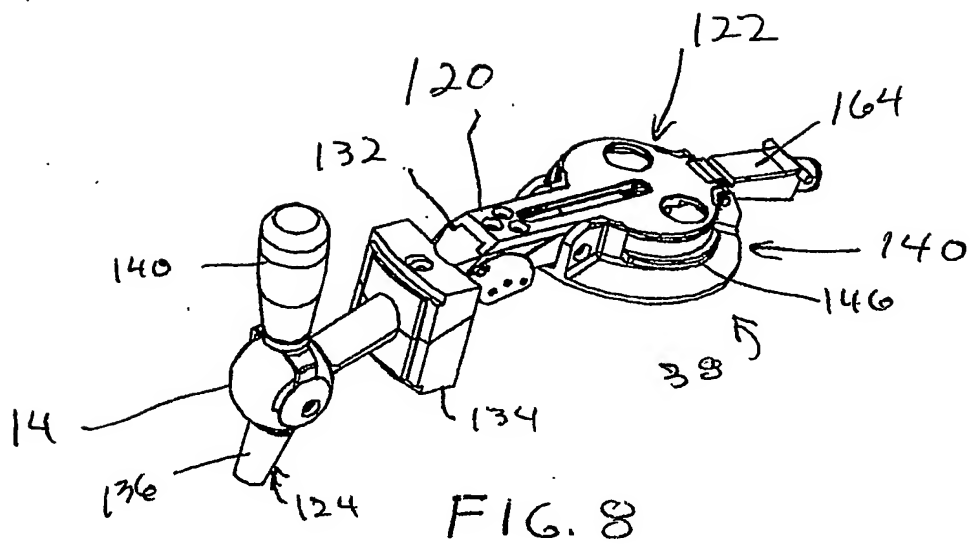


FIG. 4







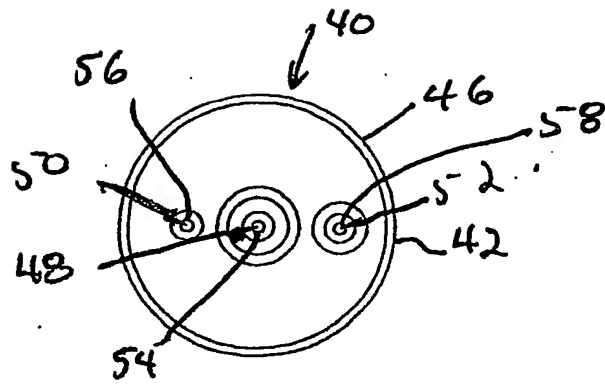


FIG. 5

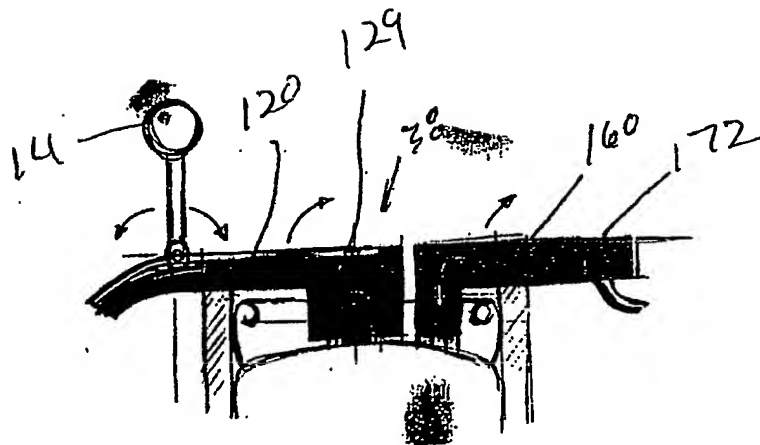


FIG. 10.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**